




VIRKAR

TACTIC D Series

TACTIC D Series - Technical Specifications

Wheel with flotation tyre	710 / 50 R26,5
Hopper capacity	7.000 liters (2 products)
Machine weight	9.000 kg ¹
Seed distribution	Pneumatic seeding system
Seed rate	From 2 to 380 kg/hectare ²
Distance between seed units	25cm
Transport folding	Automatic lock
Dosage	Electrical (ISOBUS) with pressurized hopper
Opener and depth control	TotalContour system with quick height adjustment
Useful work height range	35 cm + Adaptation wings
Hydraulic equipment requirements	LS + 3 distributors + 1 free return
Minimum tractor power required	200 hp
Standard accessories	LED working lights Toolbox Ball hitch Tramline Folder conveyor-positionable
Additional features	Wheel 800 / 44 R26.5 Electronic steering axle Lift hitch

Measures

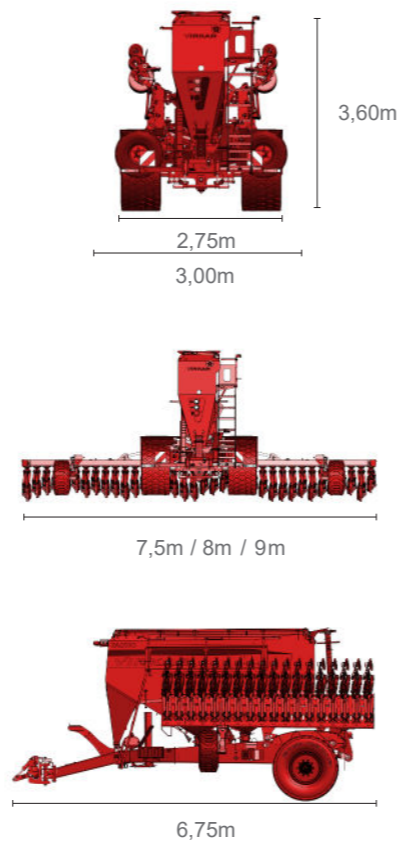

¹ Variable depending on the configuration kits
² Variable depending on the seeds



TACTIC D Series

THE TACTIC SEEDER DELIVERS HIGH-PERFORMANCE DIRECT SEEDING WITHOUT SACRIFICING CONTROL. A LARGE-CAPACITY, PRECISE AND HIGHLY MANOEUVRABLE SEEDER, DESIGNED TO COVER MORE HECTARES WITH MAXIMUM EFFICIENCY.

MODULAR DESIGN

It suits your needs, with the possibility to add a variety of optional kits.

LOW OPERATIVE COSTS

High load capacity, low drag, low consumption hydraulic system and simple low cost maintenance.

HIGH MANOEUVRABILITY



A seeder with a more compact and adapted design, for improved manoeuvrability during seeding.






■ The directional axis, optional in this seeder, provides a new freedom, sowing on a curved path. The system frees up tension in the coulters arms, extending the life of components. It can be locked for road transport.

■ Control in a simple way with an advanced hydraulic system to lift, lower and adjust an optimum coulters pressure on the seed units from the tractor cab. Independent hydraulic system designed to have a low fuel consumption, allowing pressure to be adjusted on the field.

■ The most advanced no-tillage system on the market. It can be used to work on different types of soil and in the most difficult conditions involving stones, harvest residue and high moisture. The hydraulic control of the single disc with parallelism system allows sowing throughout the entire depth range with low maintenance costs.

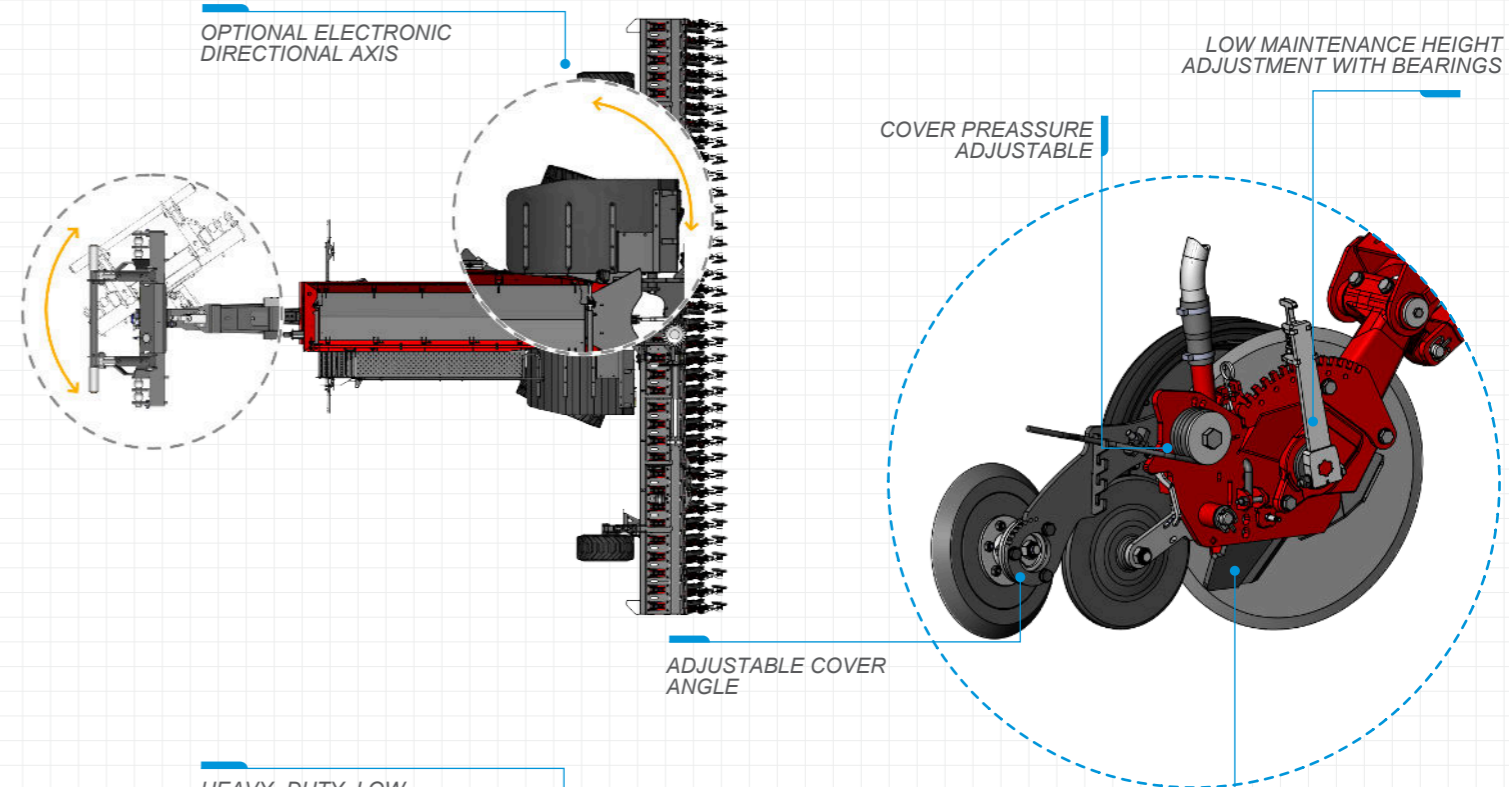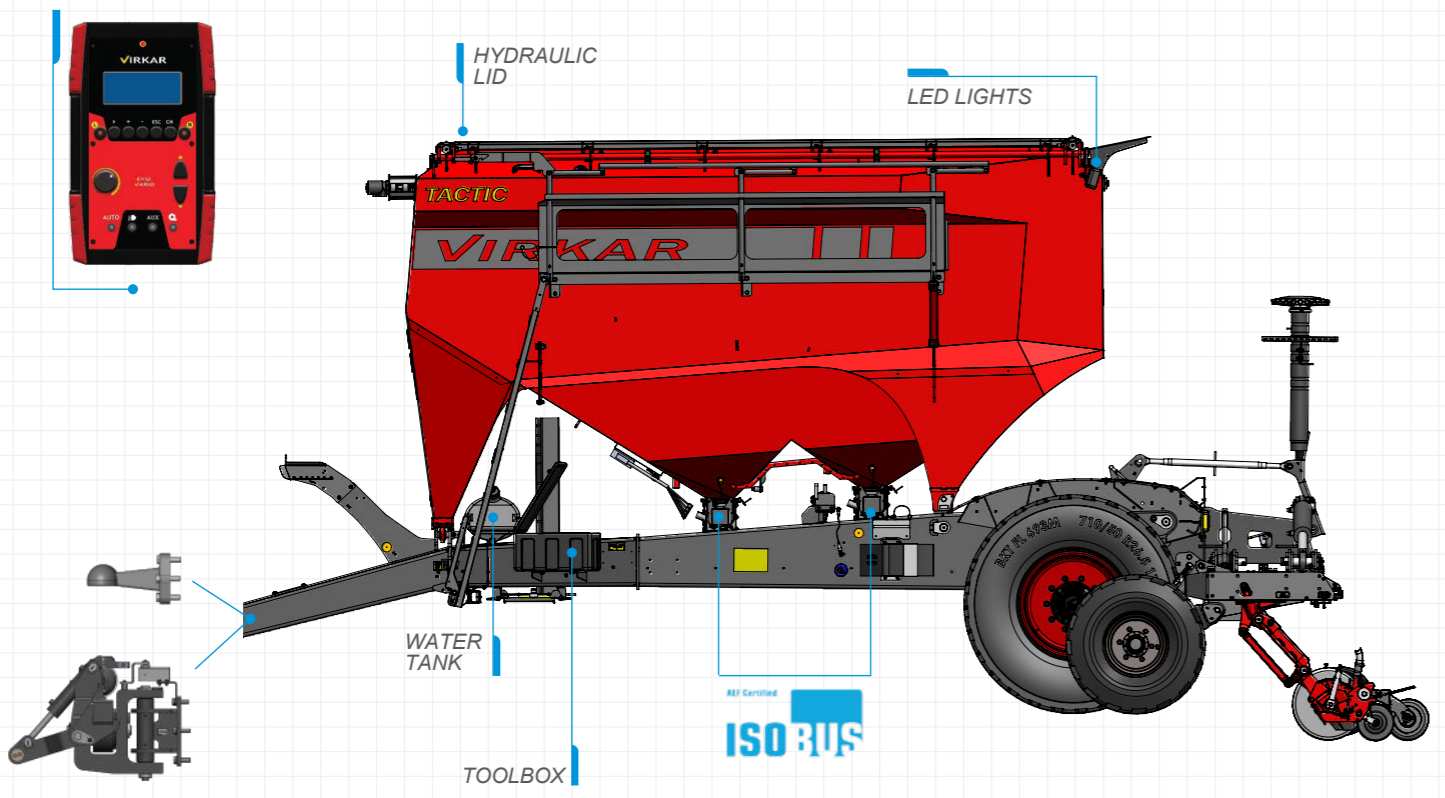

2 PRODUCTS: 7.000 L (4.200 L / 2.800 L)

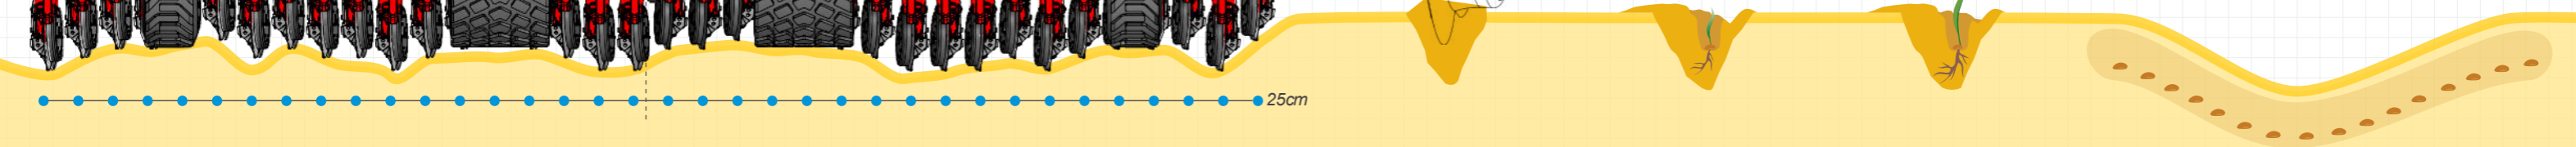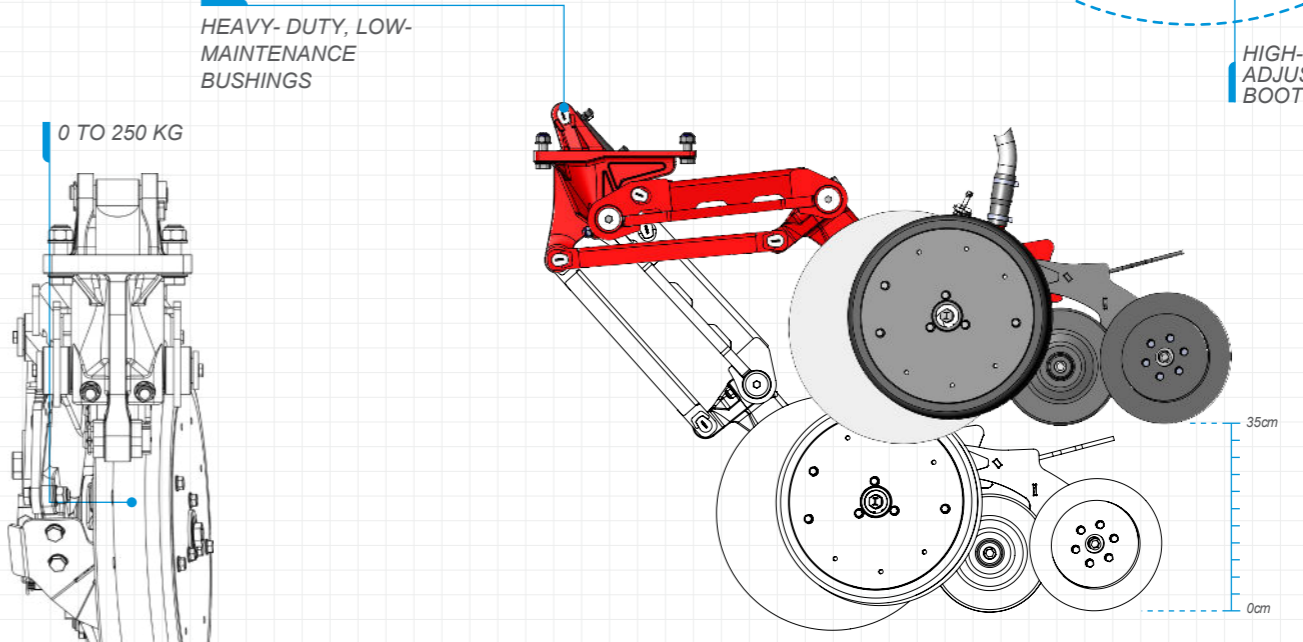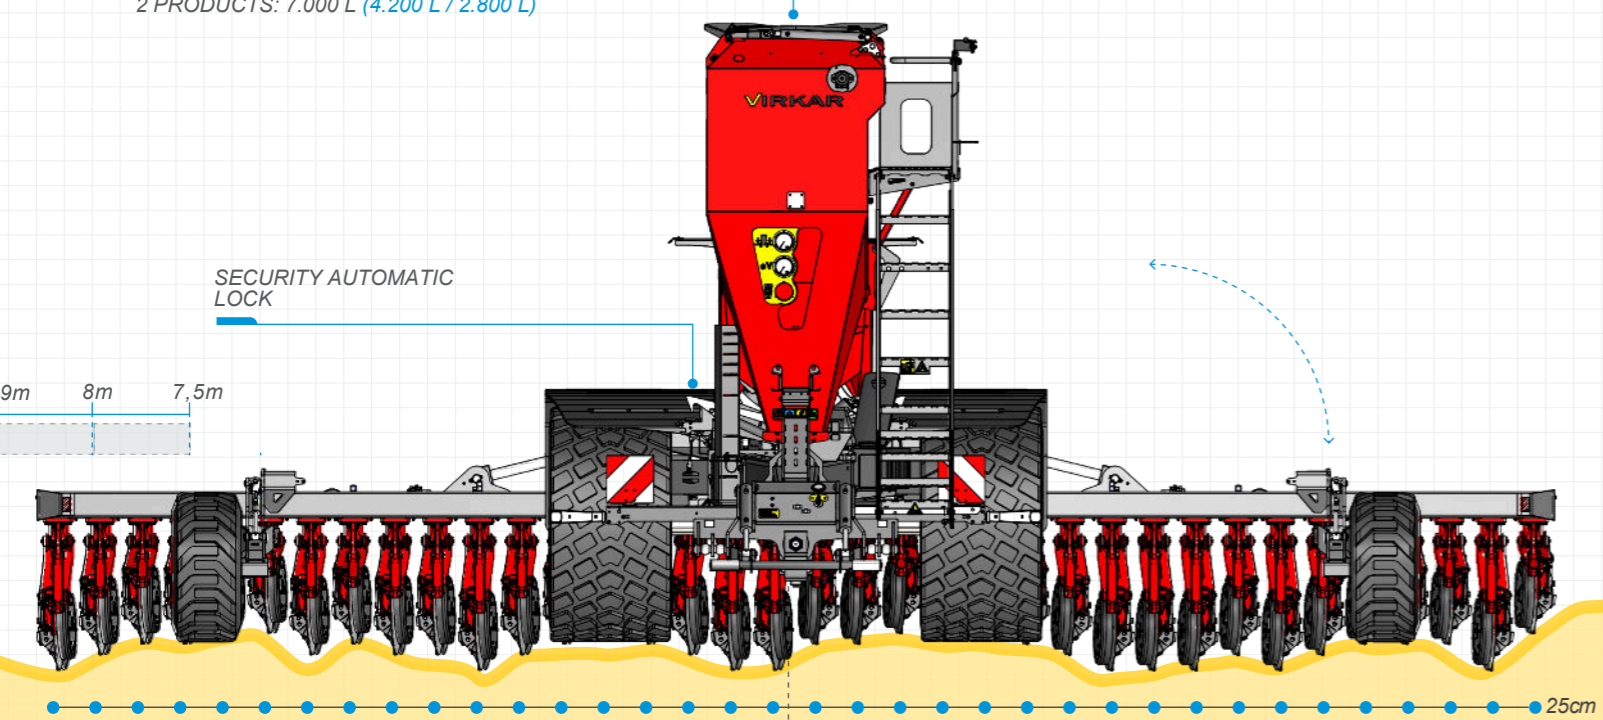

WITHOUT COMPACTION PERFECT GERMINATION

PRECISE DEPTH WITH PARALLELOGRAM AND PRESS WHEEL